



D6095 Adjustable friction mortice restraining stay 395mm Channel for approx 90° Opening

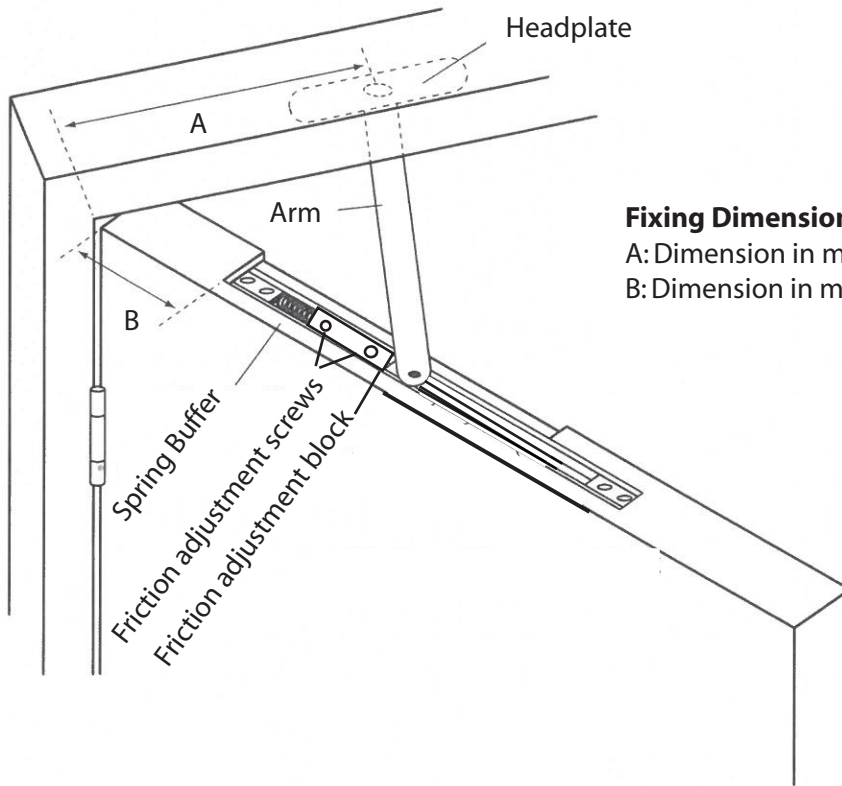

Fixing Dimensions

A: Dimension in mm from hinge axis to centre of headplate
B: Dimension in mm from hinge axis to aluminium channel

Opening	A	B
90°	150	90

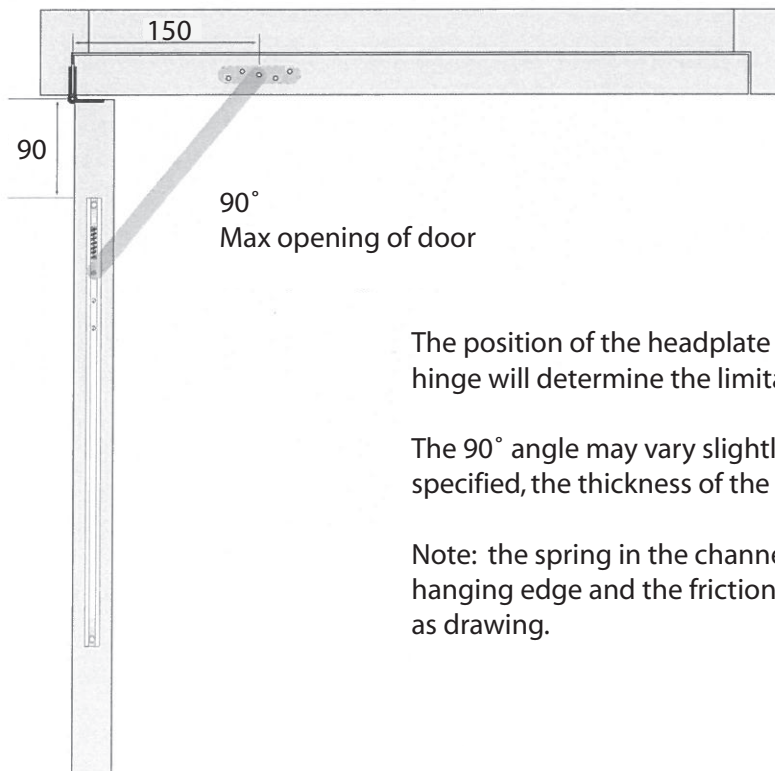


The position of the headplate and the channel in relation to the butt hinge will determine the limitation of opening.

The 90° angle may vary slightly depending on the axis of the hinge specified, the thickness of the door, position of channel and head plate.

Note: the spring in the channel should be positioned nearest to the hanging edge and the friction adjustment block screws positioned as drawing.

Preparation for channel and headplate to top of door

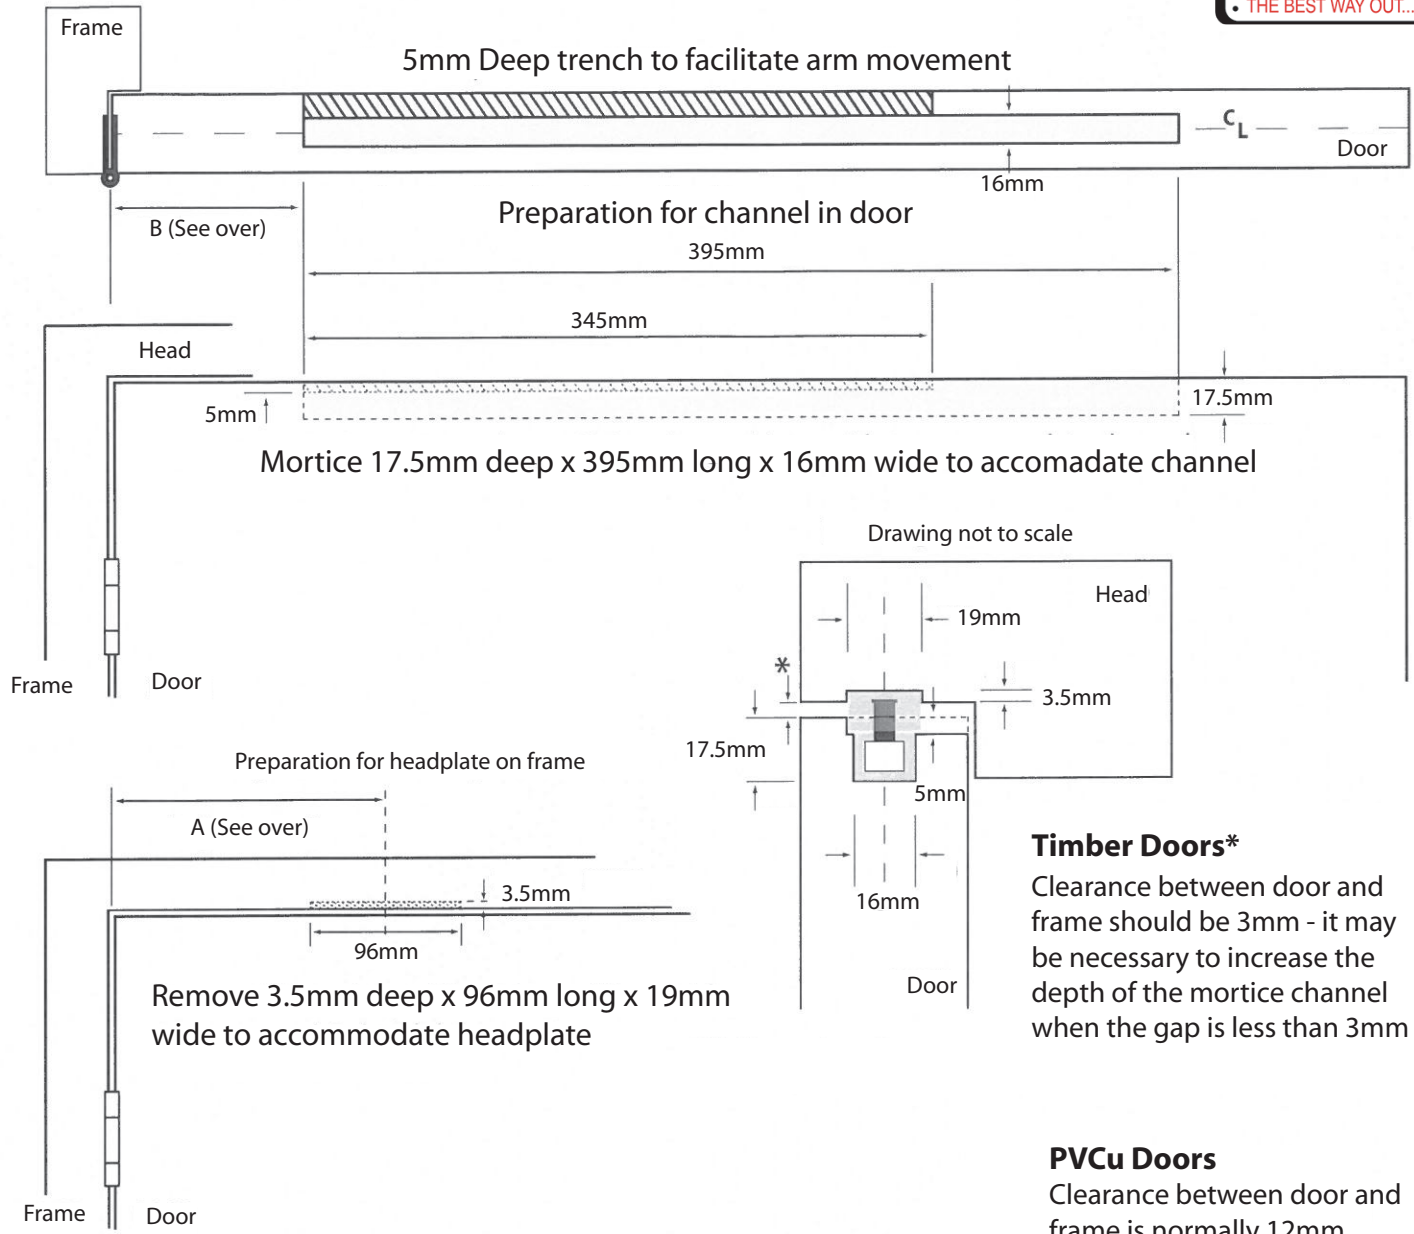

Timber Doors*

Clearance between door and frame should be 3mm - it may be necessary to increase the depth of the mortice channel when the gap is less than 3mm

PVCu Doors

Clearance between door and frame is normally 12mm
A small packer may be required to support head bracket (supplied by others)
It may be necessary to adjust dimensions A and B when fitting to PVCu doors due to the varying types of door hinges

Application:

Suitable for use with Timber, PVCu and Aluminium windows or light doors

Material:

- Aluminium extruded channel with steel arm and headplate
- Nylon friction block with adjustment screws
- Stainless steel buffer spring

