


Strand Smoke Control

Before ordering we need to know the following:

To help specify the correct brackets for fixing to materials Timber, Aluminium and PVC-U please mark dimensions onto the drawings shown here. For PVC-U and Aluminium, the step (distance between face of sash and frame) is very important

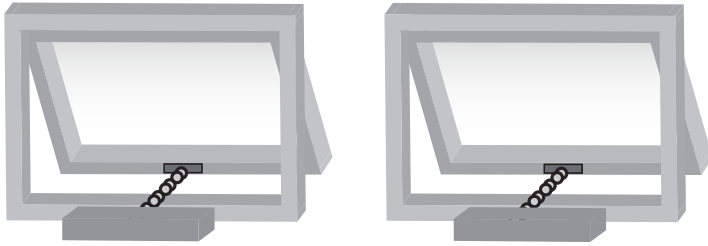

To enable an accurate quotation to be prepared. Please provide the following information:

QUESTIONS ABOUT THE SYSTEM

- 1 What specification/products have been asked for ?
- 2 How many windows are to be controlled ?
- 3 Where are the window/s located ? i.e. stairwell etc.
- please provide a floor plan with windows clearly indicated
- 4 How is the system to be operated ? i.e. connected to an existing building fire alarm system*
- 5 Are any additional inputs required ? i.e. smoke detectors

QUESTIONS ABOUT THE WINDOWS

- 1 What is the window material ?

PVC-U	<input type="checkbox"/>
Timber	<input type="checkbox"/>
Metal	<input type="checkbox"/>
Other	<input type="checkbox"/>
- 2 Dimensions of windows ? widthmm heightmm
- 3 Sash and frame details with dimensions would be useful
- see drawings shown.
- 4 Position of hinges ?




Top	<input type="checkbox"/>
Side	<input type="checkbox"/>
Bottom	<input type="checkbox"/>
- 5 Direction of opening ?

Inwards	<input type="checkbox"/>
Outwards	<input type="checkbox"/>
- 6 Are the windows ?

Vertical	<input type="checkbox"/>
In a pitch of roof	<input type="checkbox"/>


SASH & FRAME DETAIL

Typical examples

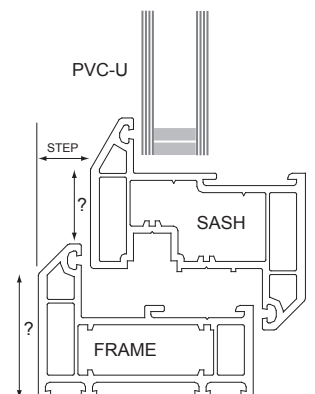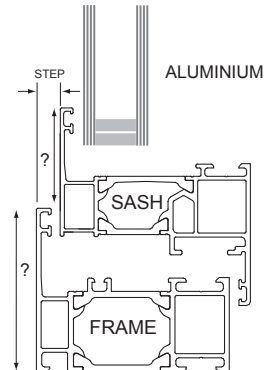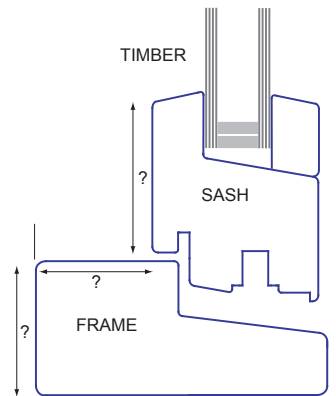

*Stand alone or interlinked smoke detector not forming part of a building fire alarm system i.e. control panel, detectors etc. are not suitable for linking to a smoke control panel.
Note: These points are intended to serve as a guide only and should not be considered as definitive. No responsibility can be accepted for errors or omissions.


TYPICAL STYLES OF WINDOW



Side hung open out



Horizontal pivot window



Vertical pivot window



Top hung open out



Bottom hung open in

For safety reasons we recommend fitting side support stays to all bottom-hung windows